

Ball valve with extended stem type GK11



Description:

Ball valve, made of brass, with extended stem for to shut off insulated pipes.

Features:

- suitable for **gaseous & liquid media**
- extended stem for insulated pipes
- high quality brass
- blow out proof stem design
- floating ball
- full port according to DIN EN 1983

Connection:

3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2", 2" inch

Construction:

extended stem

Pressure:

0 – 40 bar

Design:

Body:

with extended stem

Ball:

brass nickel plated CW617N

Ball seal:

brass chrome plated CW614N

Spindle seal:

PTFE

Handle:


FKM

Temperature:


steel zinc plated

-20°C to +180°C

Pressure-temperature-diagram:

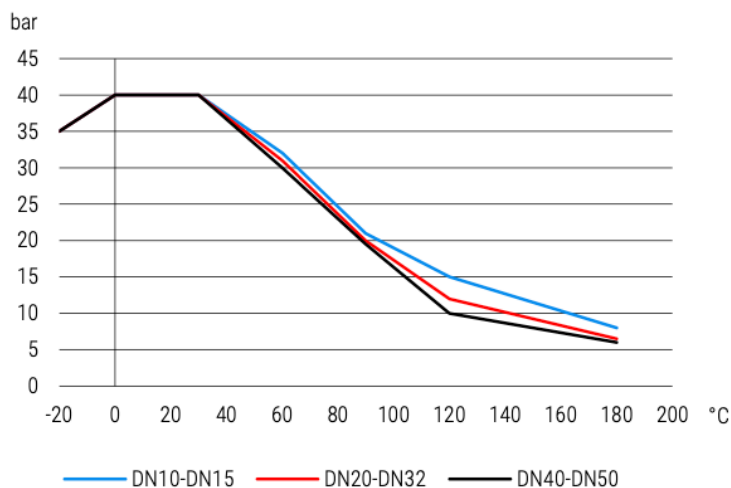

Materials:

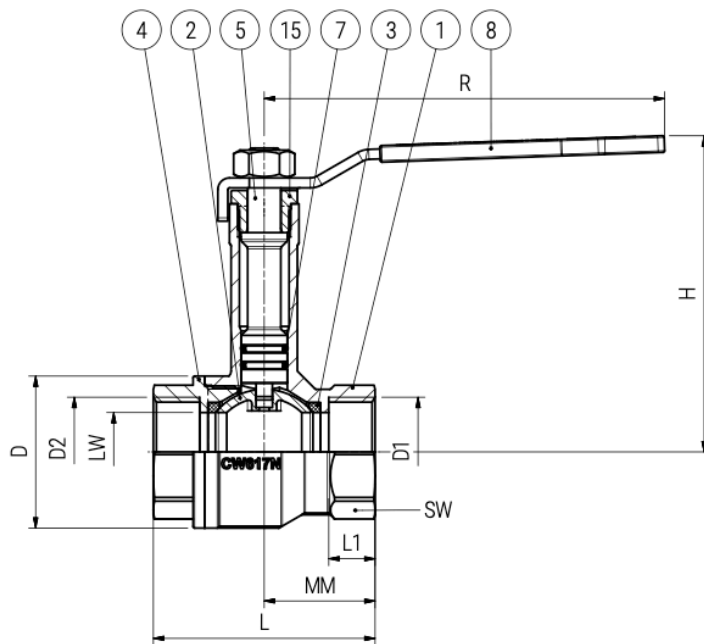

No.	Description	Material
1	Body	brass (nickel plated) CW617N
2	Ball	brass (chrome plated) CW614N
3	Ball seal	PTFE
4	Flange / nipple	brass (nickel plated) CW617N
5	Stem	brass (nickel plated) CW617N
7	Spindle seal	FKM
8	Handle	steel zinc plated
15	Packing nut	brass (nickel plated) CW617N

Dimensions:

DN	LW	PN	D1 / D2	L	L1	MM	H	D	R	SW	Weight kg
10	9	40	G 3/8"	39	9,5	19,5	81	24	81,5	20	0,18
15	14	40	G 1/2"	50	11	25	85	31	101,5	25	0,29
20	19	40	G 3/4"	56	11	28	88	40	101,5	31	0,35
25	24	40	G 1"	67	14	33,5	95,5	46	121	38	0,55
32	30	40	G 1 1/4"	77	14	38,5	111	57	121	48	0,81
40	38	40	G 1 1/2"	90	16	45	125	69	158	54	1,23
50	47,2	40	G 2"	106	18	53	133,5	85	158	66	1,79

Article number:

Type	Version	Seal	Size
GK11	00 – with extended stem	00 – PTFE	02 – 3/8" 03 – 1/2" 04 – 3/4" 05 – 1" 06 – 1 1/4" 07 – 1 1/2" 08 – 2"

Example no. GK11000005:

GK11	00	00	05
------	----	----	----

Ball valve

Version: with extended stem

Seal: PTFE

Size: 1"

Image similar, subject change without notice.